



## Door Removal

Remove (snap off) the plastic  
“cwcabinet.com” cover cap

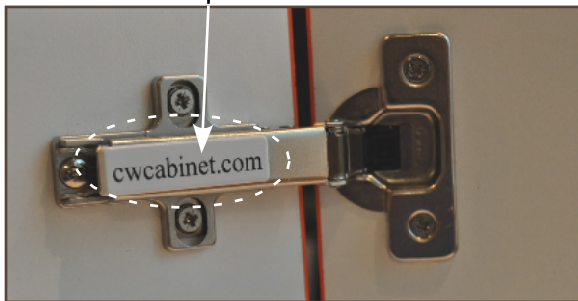


Push down  
the rear lever

Simultaneously  
push the door at  
the hinge cup  
arm away

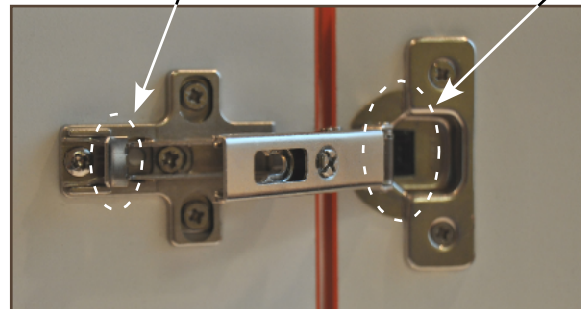

## To Reinstall The Door


Align the hinge arm to the hinge plate front. First, engage “hook section” behind the arm and then push back and snap to the rear lever.

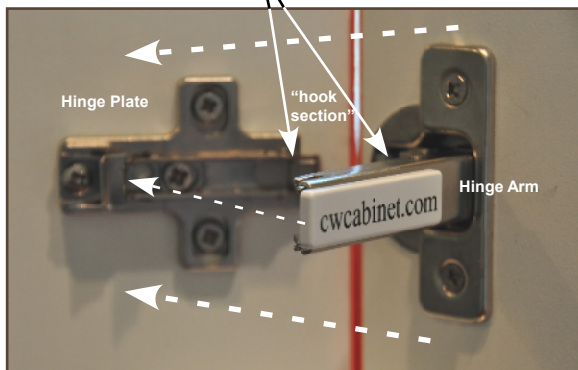

Turn this screw to adjust  
the door side to side

## Hinge Adjustments

*Be sure to adjust both  
hinges on the door*

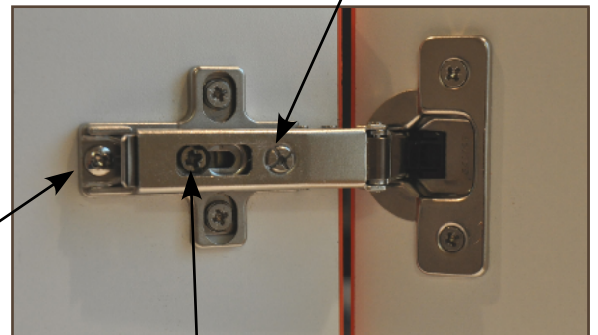

Remove “cwcabinet.com” cover  
cap to reveal adjustment screws  
(as above)

Turn this screw to move  
the door in and out

Turn this screw to move  
the door up and down